
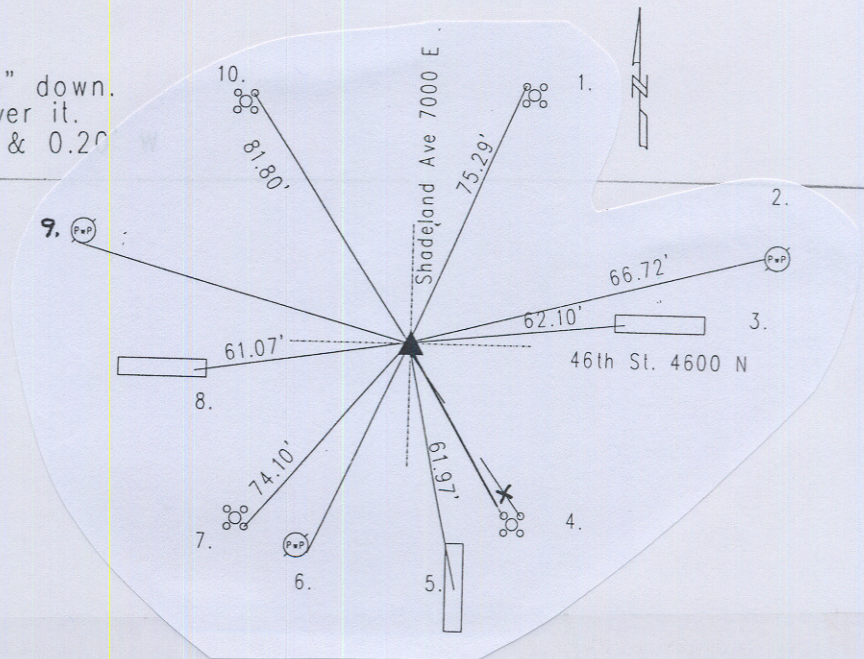


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 13 TOWNSHIP 16 RANGE 4
DATE: 10-09-06
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Note: Harrison
METHOD OF ESTABLISHMENT: County: 6-21-96

IN. S.P.C. E ZONE, NAD 83
NAME: 16041301
N: 509864.9342(m)
E: 67527.4304(m)

NOTE: Found brass plug 6" down.
Set mag nail w/washer over it.
Schneider rebar is 0.73'N & 0.20'

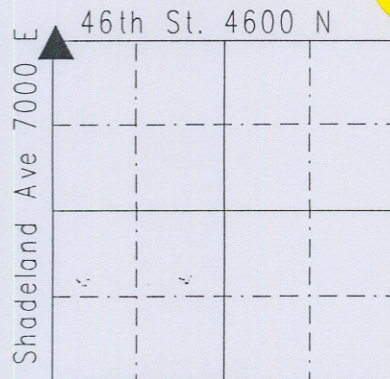

16041301 NW corner

CORNER HISTORY: Corner originally set as a post in 1820 by John Hendricks with witness: 30" beech S 73 E 16 links; 16" dogwood N 11 W 33 links per Marion County Atlas pg. 11. A survey by D. B. Hosbrook dated 1- 15&16-1856 called rock found at NW corner of 13-16-4 per Lawrence Township Legal Survey Book pg. 23. A survey by Steve Burres dated 10-20-1960 called brass monument per Lawrence Township legal Survey Book pg. 83. Reference dated 6-27-55 by Unversaw called brass pin found. Reference dated 6-13-1960 by Monroe called brass pin found. Reference dated 3-4-76 by Wilcoxon called brass plug found. Reference dated 5-20-88 by Gries called PK nail set. (Note: found brass plug 6" down. Set mag nail w/washer over it. Schneider capped rebar found 0.73'N & 0.20'W.) Reference dated 7-3-01 by Wilcoxon called the same. Reference dated 9-25-06 by Wilcoxon called same. Reference dated 10-9-06 by Wilcoxon called found mag nail w/washer over brass plug down 6", found brass plug also found Schneider's capped rebar 0.73'N and 0.20'W, no other points were found. Set Harrison where the brass plug was located.

REF.	DISTANCE	DESCRIPTION
1.	75.29'	Cut 'x' NW-bolt aluminum pole base
2.	66.72'	PK nail W PwP#1-378 A 4"up
3.	62.10'	Cut 'x' W-end of median
4.	70.08'	Cut 'x' NW -bolt aluminum pole base
5.	61.97'	Cut 'x' N-end of median
6.	74.67'	PK nail SE PwP#34-377 6'up
7.	74.10'	Cut 'x' SE-bolt aluminum pole base
8.	61.01'	Cut 'x' E-end of median
9.	102.50'	PK nail SW PwP#36-377 A 3"up
10.	81.80'	Cut 'x' NE-bolt aluminum pole base